


COMPOSITE SURGE ARRESTER

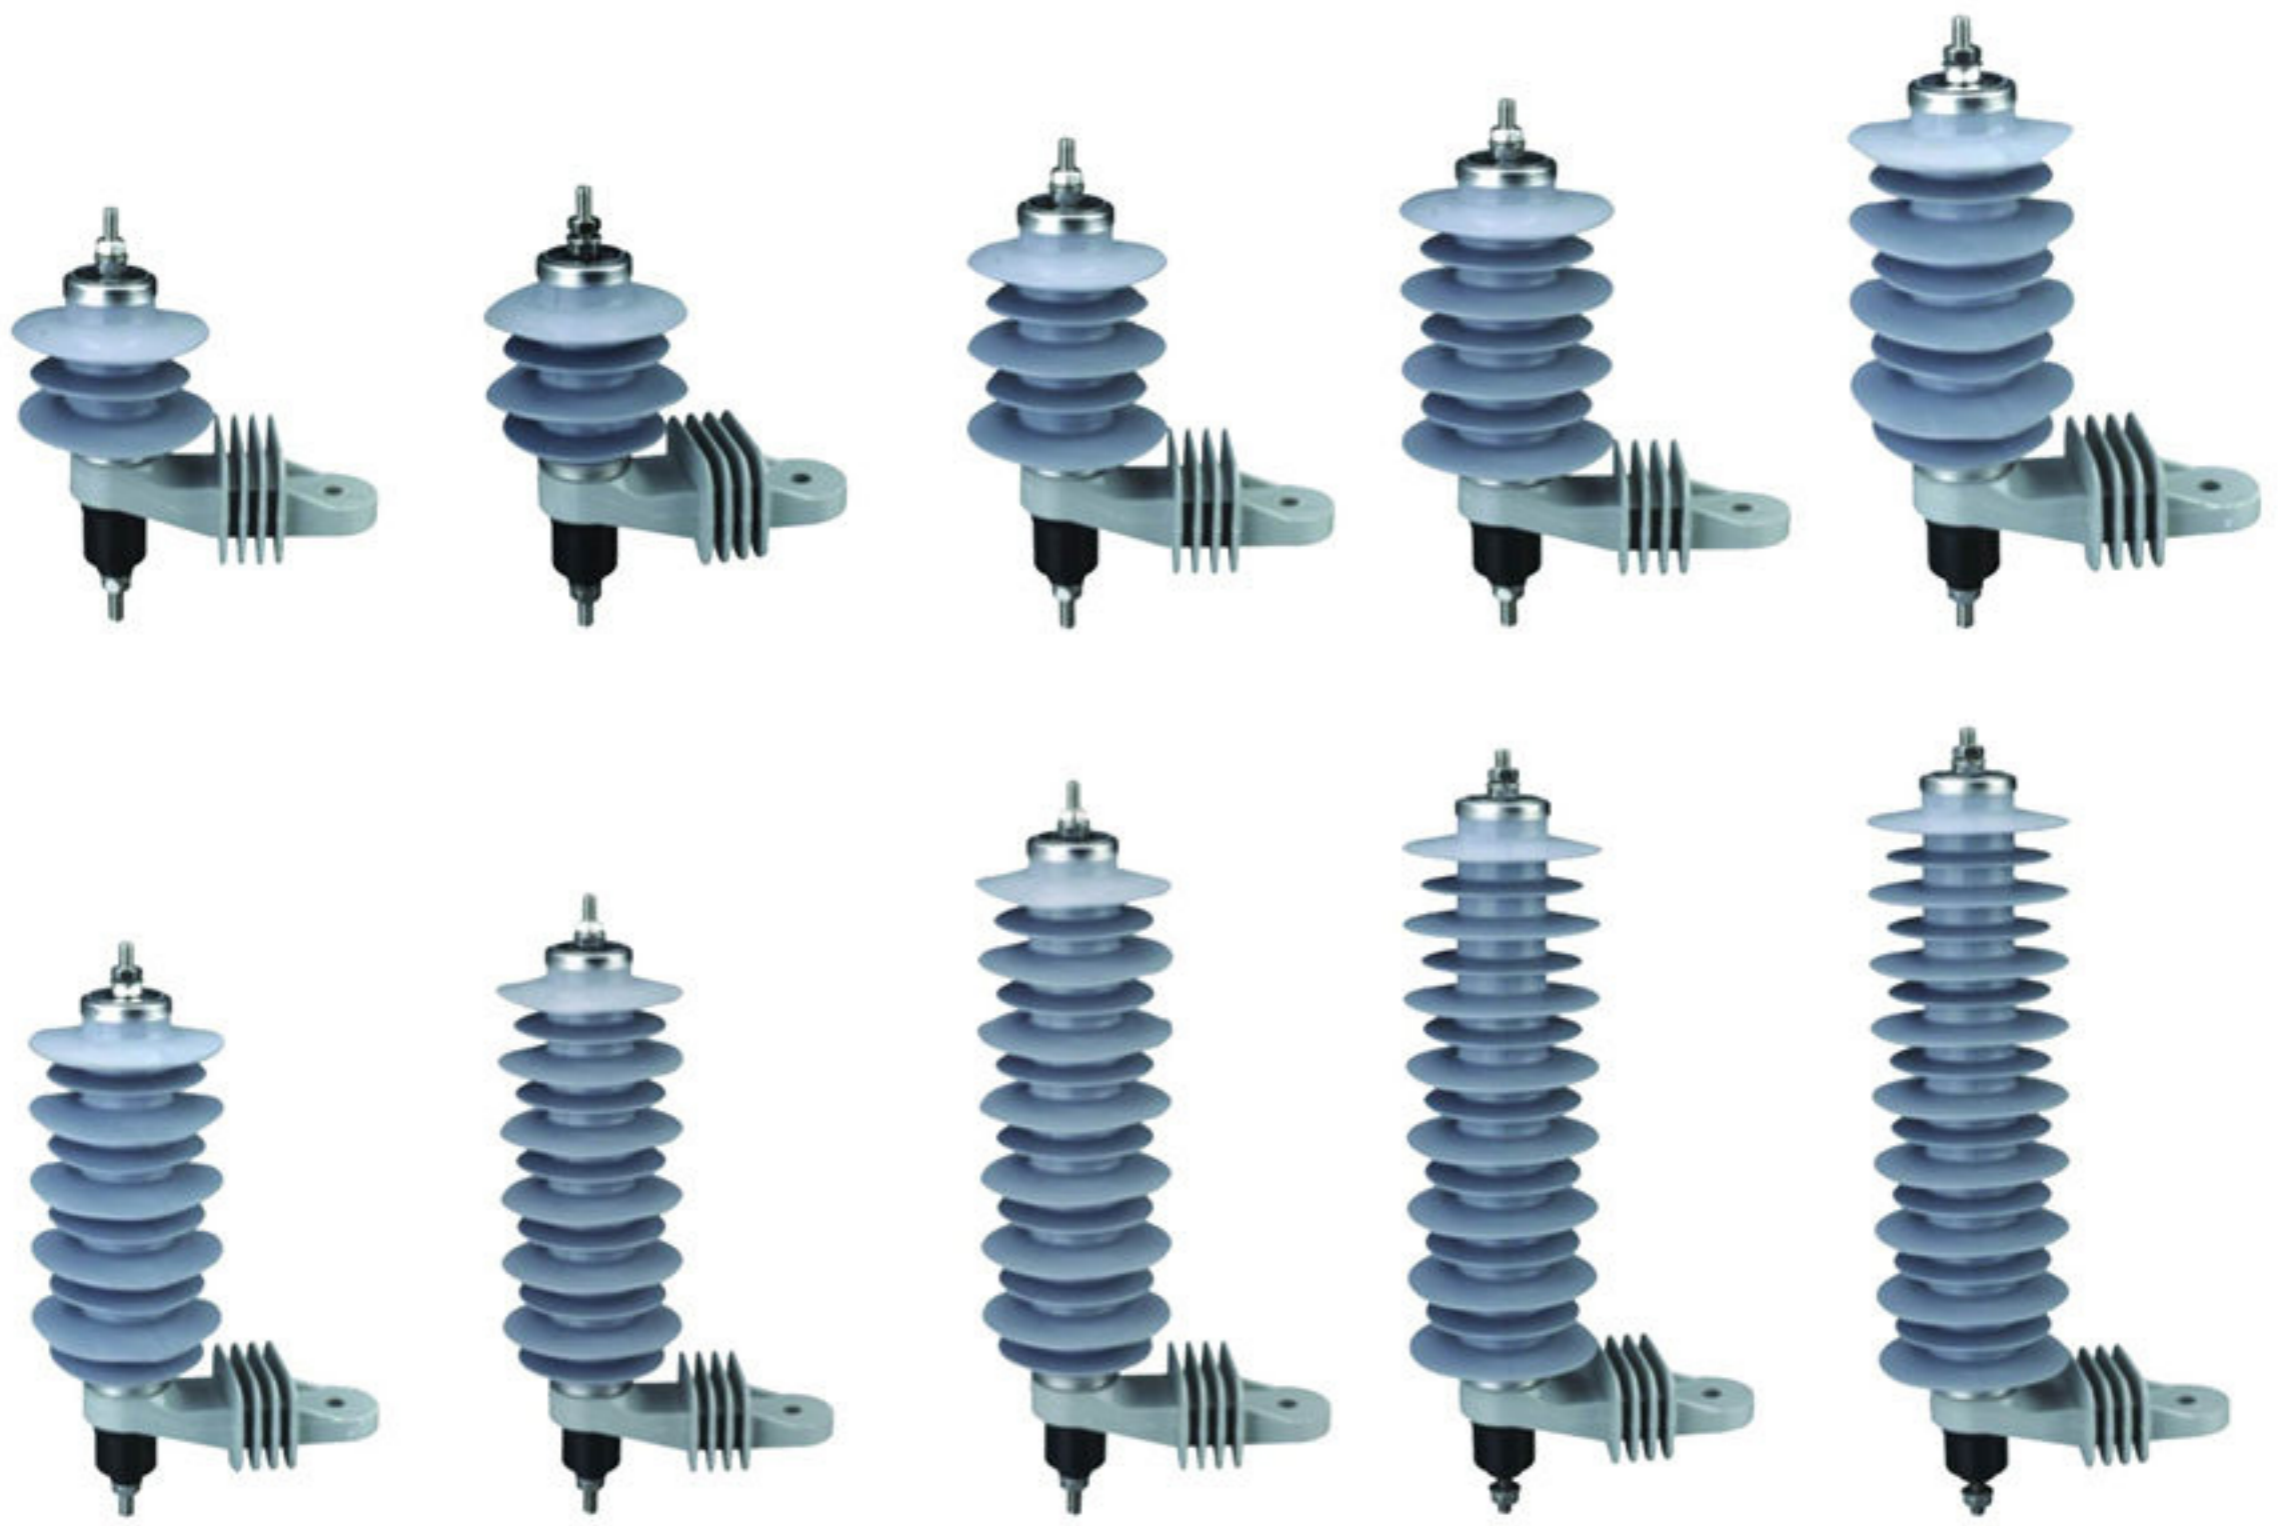

Nominal Discharge Current: 5kA

Model	Rated Voltage (kV)	Continuous Operating Voltage (kV \geq)	1/4 Steep Current Residual Voltage (kV \leq)	8/20 Lightning Current Residual Voltage (kV \leq)	30/60S Witching Current Residual Voltage (kV \leq)	2000us Rectangular Wave Current Impulse (A)	4/10 Current Withstand Discharge Capacity (kA)
YH5W- 3L	3	2.55	9.50	9	7.7	100	65
YH5W- 6L	6	5.1	19.0	18	15.4	100	65
YH5W- 9L	9	7.65	28.5	27	23.1	100	65
YH5W-12L	12	10.2	38.0	36	30.8	100	65
YH5W-15L	15	12.7	47.5	45	38.5	100	65
YH5W-18L	18	15.3	57.0	54	46.2	100	65
YH5W-21L	21	17	66.5	63	53.9	100	65
YH5W-24L	24	19.2	76.0	72	61.6	100	65
YH5W-27L	27	21.9	85.5	81	69.3	100	65
YH5W-30L	30	24.4	95.0	90	76.5	100	65
YH5W-33L	33	26.8	104.5	99	84.7	100	65
YH5W-36L	36	29	114.0	108	92.4	100	65
YH5W-42L	42	34.1	132.3	126	100.1	100	65

Note:Copper wire and mounting bracket could be assembled.


27

ELECTRICAL



JINWANG ELECTRICAL
Reliable Manufacturer
For Your Sourcing

COMPOSITE SURGE ARRESTER

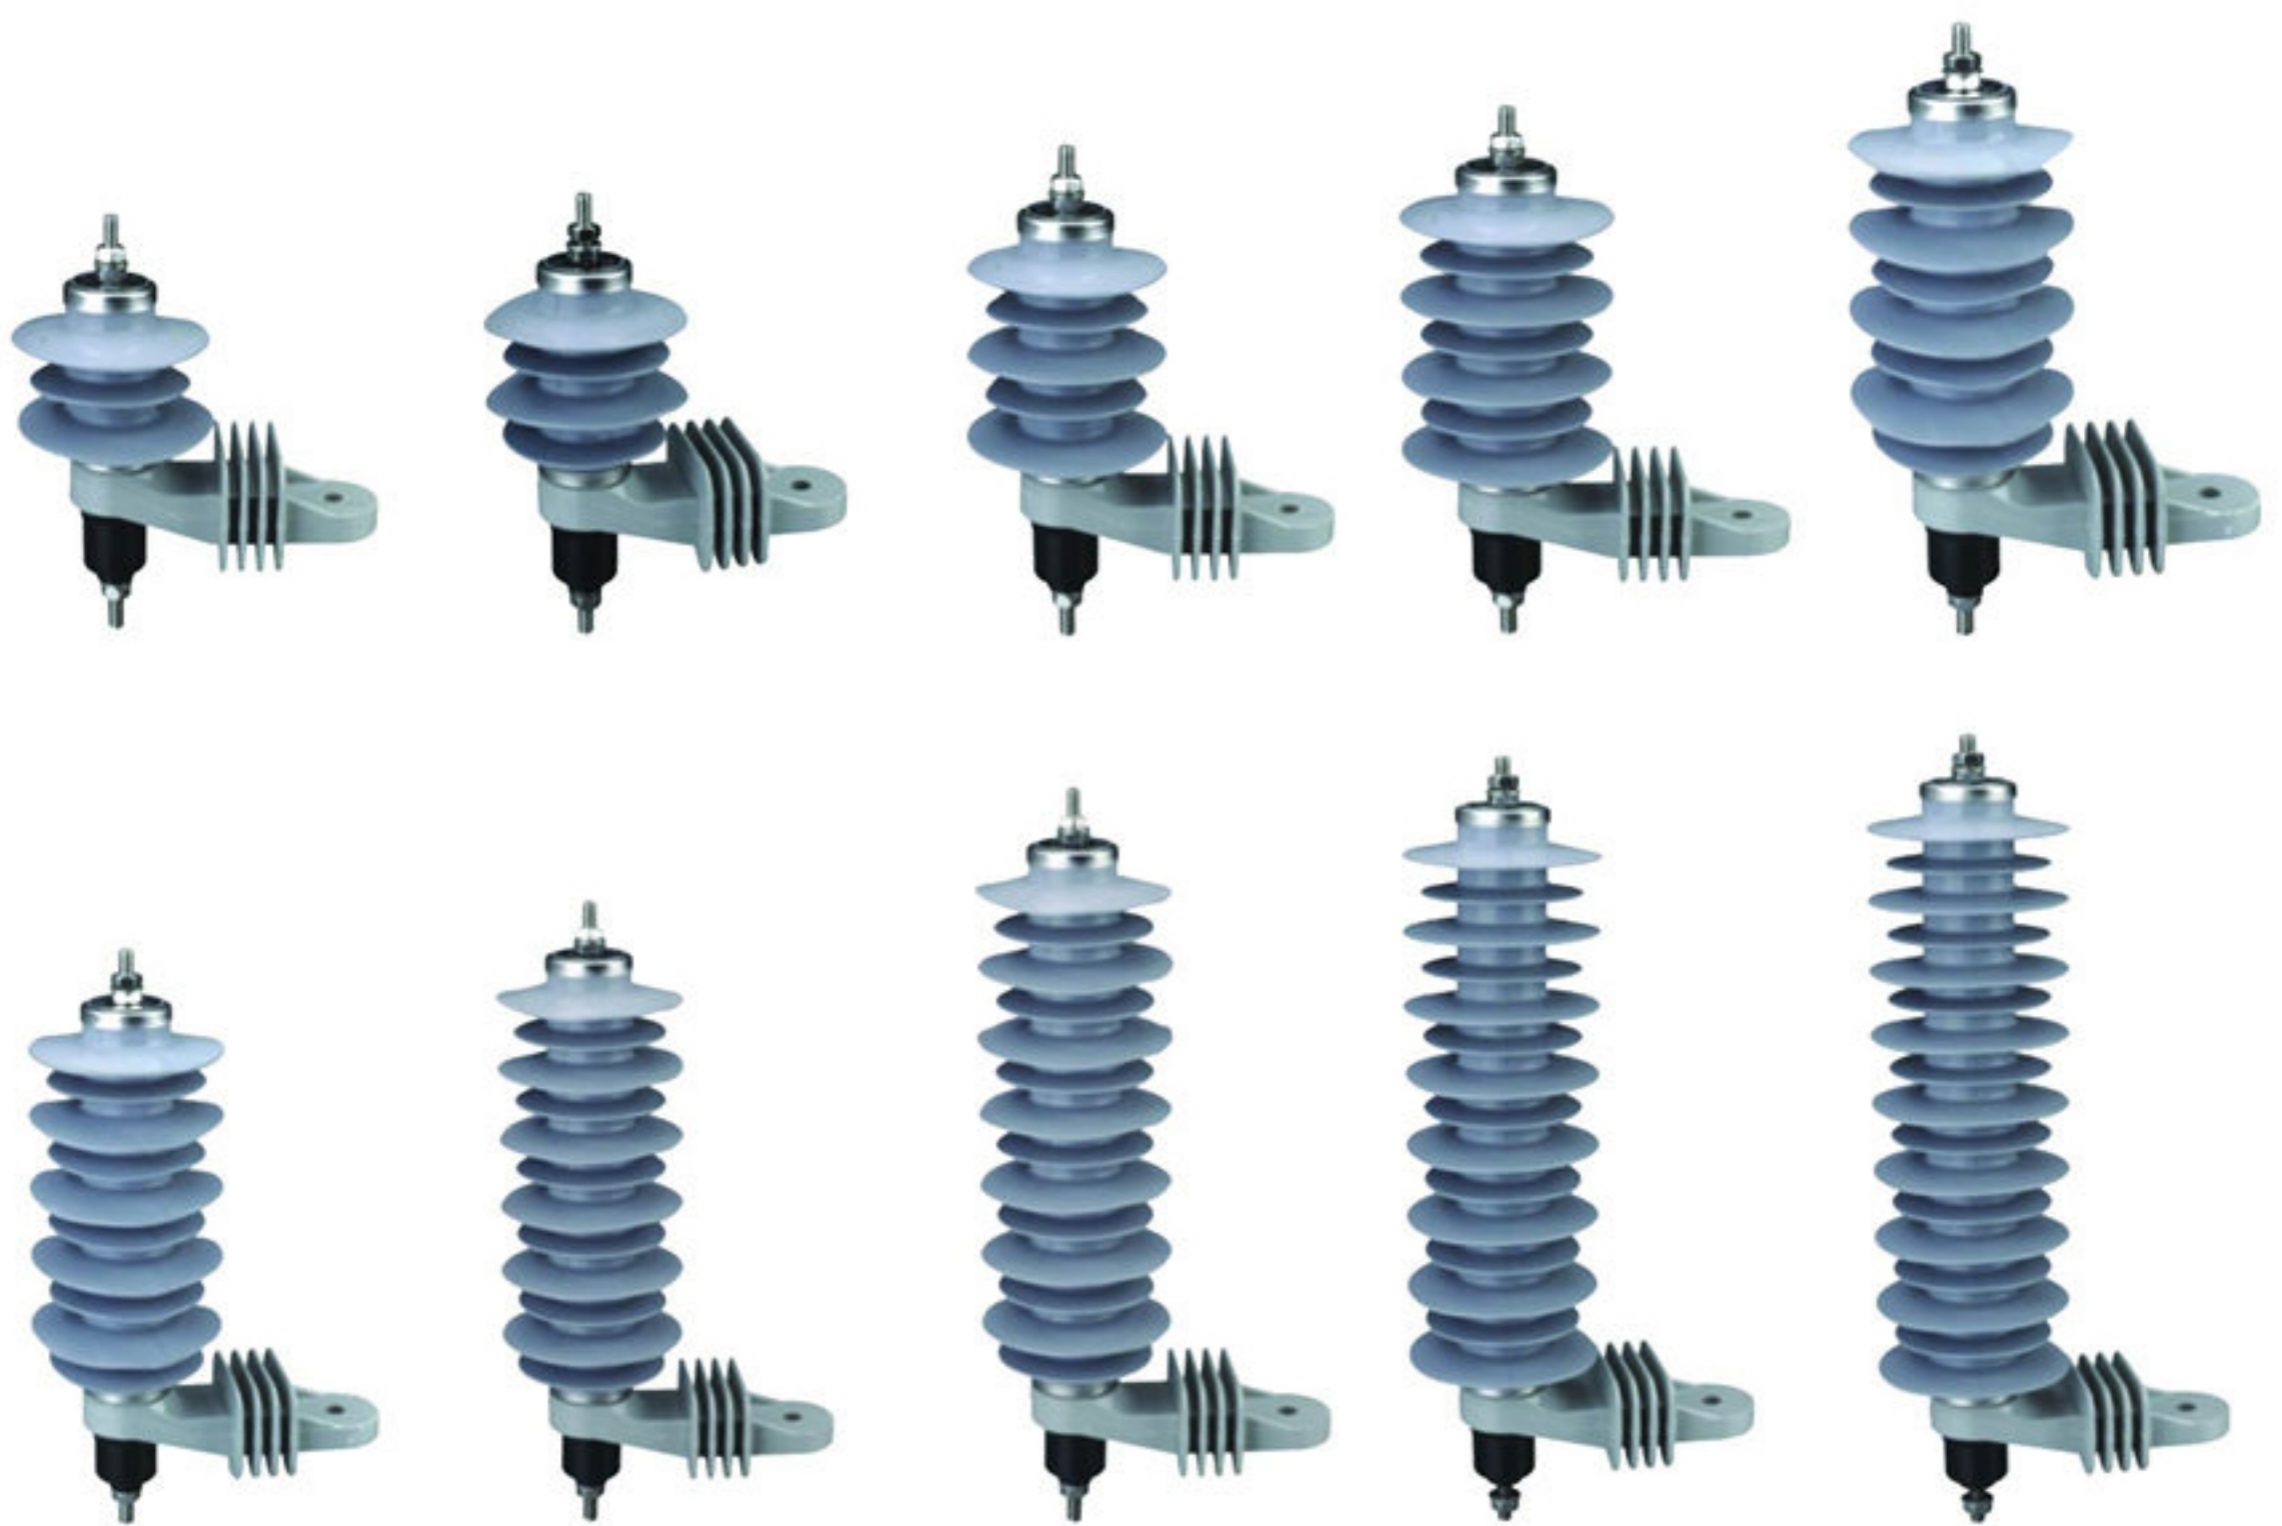

Nominal Discharge Current: 10kA

Model	Rated Voltage (kV)	Continuous Operating Voltage (kV \geq)	1/4 Steep Current Residual Voltage (kV \leq)	8/20 Lightning Current Residual Voltage (kV \leq)	30/60S Witching Current Residual Voltage (kV \leq)	2000us Rectangular Wave Current Impulse (A)	4/10 Current Withstand Discharge Capacity (kA)
YH10W- 3L	3	2.55	9.50	9	7.7	250	100
YH10W- 6L	6	5.1	19.0	18	15.4	250	100
YH10W- 9L	9	7.65	28.5	27	23.1	250	100
YH10W-12L	12	10.2	38.0	36	30.8	250	100
YH10W-15L	15	12.7	47.5	45	38.5	250	100
YH10W-18L	18	15.3	57.0	54	46.2	250	100
YH10W-21L	21	17	66.5	63	53.9	250	100
YH10W-24L	24	19.2	76.0	72	61.6	250	100
YH10W-27L	27	21.9	85.5	81	69.3	250	100
YH10W-30L	30	24.4	95.0	90	76.5	250	100
YH10W-33L	33	26.8	104.5	99	84.7	250	100
YH10W-36L	36	29	114.0	108	92.4	250	100
YH10W-42L	42	34.1	132.3	126	100.1	250	100

Note:Copper wire and mounting bracket could be assembled.